



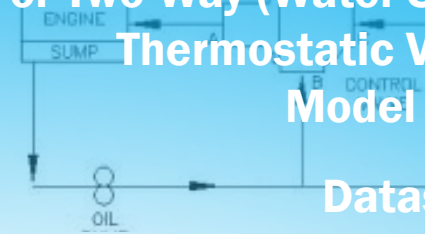

Three-Way or Two-Way (Water Saver) Thermostatic Valves Model 0750

Datasheet

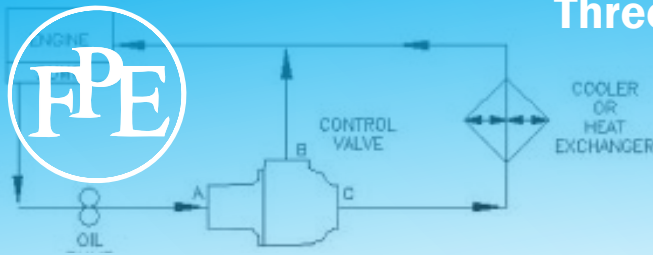

Including:

Three-Way

0750	3/4" NPT
0750D1	3/4" NPT low flow
0750J12	3/4" SAE O-ring
0750J12D1	3/4" SAE O-ring low flow
0752	1/2" NPT
0752D1	1/2" NPT low flow

Two-Way

0750JW	3/4" NPT
0750JW12	3/4" SAE O-ring
0750JW	1/2" NPT

Features and Benefits

- Wide range of temperatures
- Mountable housing
- Heavy duty
- Self-contained
- Replaceable element without breaking connections
- Non-adjustable
- Rugged construction
- Tamper-proof
- Operate in any position
- Compact



Compact, reliable temperature control

Fluid Power Energy (FPE) thermostatic valves use the principle of expanding wax, which in the semi-liquid state undergoes large expansion rates within a relatively narrow temperature range. The self-contained element activates a stainless steel sleeve, which directs flow. All FPE thermostatic valves are factory set at predetermined temperatures: no further adjustments are necessary. A wide range of temperatures are available for water and oil temperature control applications.

When used in a diverting application, on start-up the total fluid flow is routed back to the main system in the three-way valve or blocked by a sleeve in the two-way version. As fluid temperature rises to the control range, some fluid is diverted to the cooling system in the three-way valve or to drain in the two-way version. As fluid temperature continues to increase, more flow is diverted. When the thermostat is in a fully stroked condition, all fluid flow is directed to the cooling system in the three-way valve or to drain in the two-way version. FPE Thermostatic Valves may also be used in a mixing application.

In a mixing application, hot fluid enters the "B" port and colder fluid enters the "C" port. The flows mix and the thermostat adjusts to reach the desired temperature, exiting the "A" port.


FPE Thermostatic Valve Housings are made from cast aluminum or cast bronze, with other materials available.

Optional 0750 features: Plated elements and Viton® or Neoprene seals. Other options available upon request.

Model 0750 Three-Way or Two Way Thermostatic Valve

Specification



Model Number	Body Material (*)	Nominal Pipe Size	Principal Dimensions Units - inches (mm)				Max. width in other plane	Flange Drilling			No. of elements	Approx. shipping weight	Notes for numbered end notes
			"X"	"Y"	"W"	"Z"		No. of holes	Dia. of holes	Bolt circle			
*0750	AL, B	3/4" NPT	2 3/8 (60.33)	1 13/16 (46.04)	3 1/4 (82.55)	4 9/16 (115.89)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	3-way valve
*0750D1	AL, B	3/4" NPT low flow	2 3/8 (60.33)	1 13/16 (46.04)	3 1/4 (82.55)	4 9/16 (115.89)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	3-way valve
*0750J12	AL, B	SAE 12 3/4"	2 3/8 (60.33)	1 13/16 (46.04)	4 (101.60)	4 15/16 (125.41)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	3-way valve
*0750J12D1	AL, B	3/4" SAE 12 low flow	2 3/8 (60.33)	1 13/16 (46.04)	4 (101.60)	4 15/16 (125.41)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	3-way valve
*0752	AL, B	1/2" NPT	2 3/8 (60.33)	1 13/16 (46.04)	3 1/4 (82.55)	4 9/16 (115.89)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	3-way valve
*0752D1	AL, B	1/2" NPT low flow	2 3/8 (60.33)	1 13/16 (46.04)	4 (101.60)	4 15/16 (125.41)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	3-way valve
*0750JW	AL, B	3/4" NPT	2 3/8 (60.33)	1 13/16 (46.04)	3 1/4 (82.55)	5 3/8 (136.53)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	2-way valve
*0750JWJ12	AL, B	SAE 12 3/4"	2 3/8 (60.33)	1 13/16 (46.04)	4 (101.60)	5 3/8 (136.53)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	2-way valve
*0752JW	AL, B	1/2" NPT	2 3/8 (60.33)	1 13/16 (46.04)	3 1/4 (82.55)	5 3/8 (136.53)	2 1/8 (53.98)	N/A	N/A	N/A	1	AL=1.5#, B=4.5#	2-way valve

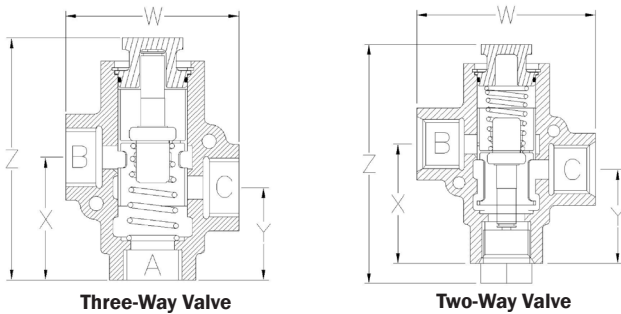

Pressure Ratings	
Material	PSI
AL, B	150

* Replace * with body material type: AL= Aluminium B = Bronze
 Note: Two-Way water-saver valves must have weep hole.
 For port sizes not shown consult factory.

Flow vs. Pressure Drop

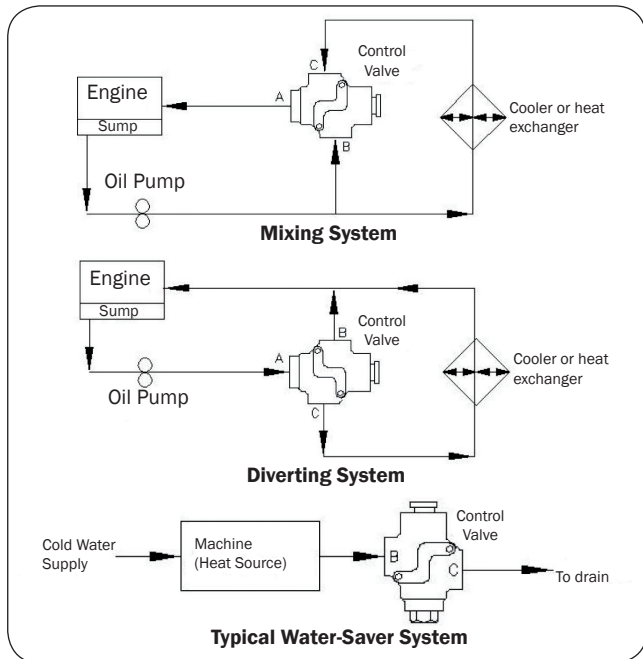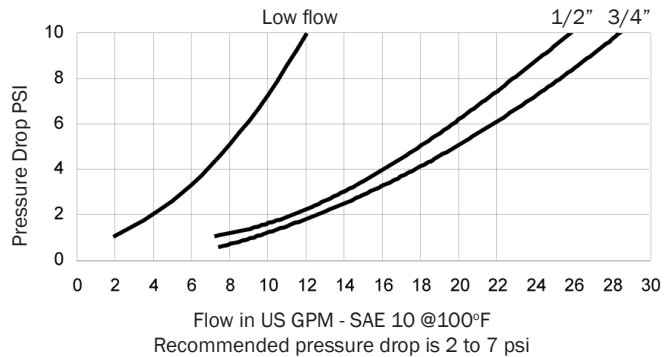

Spare Parts

Part Number	Description
*0750-1	Valve Body (*See table for material)
*0750-3	Cap
0750-4	Spring
0750**6	O-ring (Standard material is Buna-N)
0750-7	Snap ring
0750-9	Sleeve (Specify weep hole or low flow)
0760-Temp	Thermostat (Temp to follow dash)
0750-10	PLUG (2-way valve only)
FPE Model 0700* Replacement kit (includes the following):	
0750-4	Spring
0750**6	O-ring (Standard material is Buna-N)
0760-Temp	Thermostat (Temp to follow dash)
(For Viton* (V) or Neoprene (E) O-ring material, replace ** with V or E) Viton® is a registered trademark of Dupont Dow Elastomers	

Americas

Global Headquarters
 Fluid Power Energy Inc
 W229 N591 Foster Court
 Waukesha, WI 53186
 USA

Tel: +1 262-548-6220
 Fax: +1 262-548-6239
 Email: fpeinfo@fpevalves.com

Europe, Middle East, Africa, India, Russia & Asia Pacific

Fluid Power Energy Inc
 Steinackerstraße 20
 D-79576 Weil am Rhein
 Germany

Tel: +49 (0)7621 940 9990
 Fax: +49 (0)7621 940 99940
 Email: info@fpevalves.de

Peoples Republic of China

FPE (Shanghai) Industry Co., Ltd
 2F 5#Building No.166 Mindong Rd,
 Pudong, Shanghai, 201209
 China

Tel: +86 (0)21 6163 0930
 Fax: +86 (0)21 6163 0930
 Email: jerry.s@fpevalves.com



www.fpevalves.com